Winter SPECIAL 2012/2013

Special offer prices valid until 31.01.2013!

Distributed by:

PromixSweden
Webbutik:
http://www.promixsweden.se

OMNITRONIC SHP-300 Stereo headphones

Closed stereo headphones | Powerful bass-driven stereo sound | 44 mm speaker | Collapsible and rotating earcups

Transducer type:	Dynamic
Frequency range:	20-20000 Hz
Speaker:	44 mm
Impedance:	32 ohms
Sensitivity:	108 dB
Cable length:	170 cm
Connection:	3.5 mm stereo jack plug
Weight:	115 g

No. 14000328

OMNITRONIC M-22 Dynamic microphone

Encapsulation against the build-up of static charge | On/off switch | 3 m jack cable | For studio and stage use

Typ:	Dynamic
Directivity pattern:	Unidirectional
Frequency range:	50 - 13000 Hz
Impedance:	500 ohms
Sensitivity:	-53 dB (±3 dB)
Connection:	3.5 mm jack (1/8")
Dimensions:	55 x 220 mm
Weight:	250 g

No. 13000420

EUROLITE N-10 Smoke machine

For small party rooms | On/off remote control | Mounting bracket

Power supply:	230 V AC, 50 Hz ~
Power consumption:	500 W
Smoke-output:	approx. 2.3 m
Warm-up time:	approx. 7 min.
Fluid consumption:	approx. 21 ml/min.
Output volume:	approx. 50 m³/min.
Tank capacity:	0.25 l
Fuse:	F 5 A, 250 V
Dimensions (LxWxH):	275 x 145 x 170 mm
Weight:	1.5 kg

No. 51701943

EUROLITE LED PAR-56 RGB 5mm Short 5CH

Short spot with 151 x 5 mm LED: 51 x red, 49 x green, 51 x blue | Operable in stand-alone mode or with DMX interface | Locking possibility at the mounting bracket | Ready for connection with power cord and safety plug

Power supply:	230 V AC, 50 Hz ~
Power consumption:	23 W
DMX-control-channels:	max. 5
LED type:	5 mm
Number of LEDs:	151 (51 x red, 49 x green, 51 x blue)
Beam angle:	21°
Dimensions (LxWxH):	165 x 205 x 240 mm
Weight:	1.5 kg

No. 51913618 .....silver
No. 51913619 .....black

DMX

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

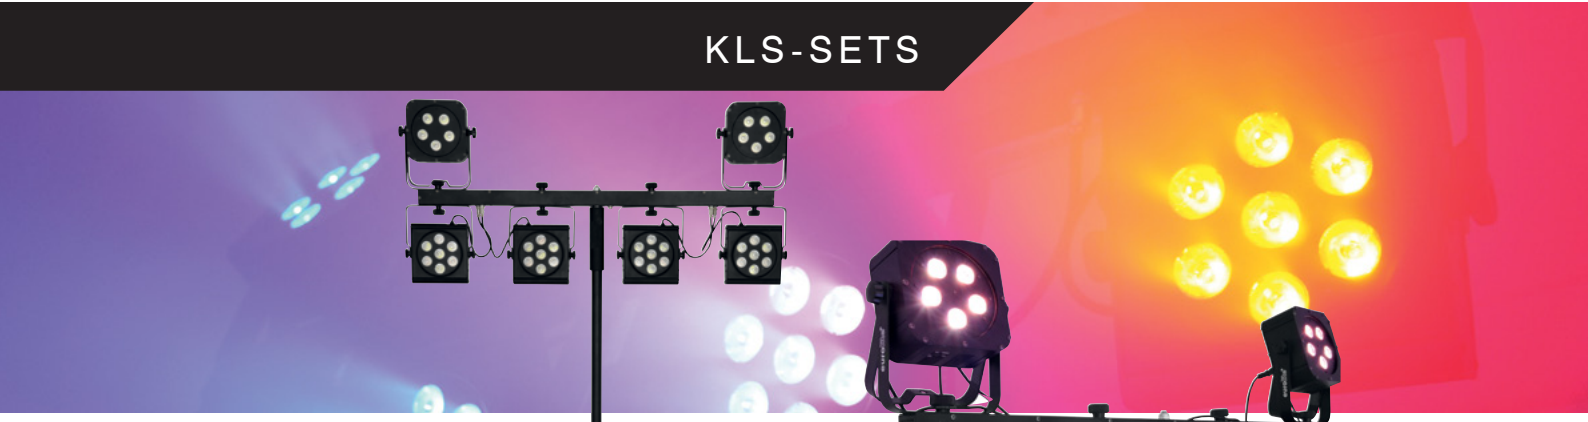

HIGH POWER LED | RGBA | DMX | QCL | RGBW

EUROLITE KLS-Kombo Pack 9 |

Combines six LED spots and four flower effects | The standard light system for every small band, solo entertainers and parties | Set consisting of: 42109890 EUROLITE LED KLS-2001 Compact lightset, 2 x 51915380 EUROLITE LED SLS-5 QCL 5x5W Floor, 60004120 Speaker system stand alu, black, 59007081 EUROLITE STV-3529 Adapter long | Details to the products: | KLS-2001 Compact lightset | Complete LED light set with 4 spots | Compact and easy to transport | 7 quadcolor LEDs (QCL) per spot (3 x RGBA and 4 x RGBW) | 4 IEC outputs for power supply of further devices | SLS-5 QCL 5x5W Floor | Equipped with 4in1 quadcolor LEDs for homogeneous light output in the colors red, green, blue and white

No. 42109549

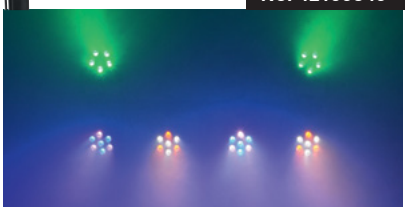

HIGH POWER LED | RGBAW | DMX

EUROLITE KLS-Kombo Pack 10

| Combines four LED spots, a flower effect and a water effect | The standard light system for every small band, solo entertainers and parties | Set consisting of: 42109781 EUROLITE LED KLS-401 Compact lightset, 51918665 EUROLITE LED PIX-3 Flower effect, 2 x 51918612 EUROLITE LED MF-100 Flower effect, 60004120 Speaker system stand alu, black, 59007081 EUROLITE STV-3529 Adapter long | Details to the products: | KLS-401 Compact lightset | Complete LED light set with 4 spots | Compact and easy to transport | 720 LEDs | 4 IEC outputs for power supply of further devices | LED PIX-3 Flower effect | An angled row with 3 glass lenses offer phenomenal effects | Operable in stand-alone mode or DMX interface | Functions: Auto mode, sound control, internal programs, strobe settings via DMX, Master/Slave | Equipped with 192 x 5 mm LED (48 x red, green, blue and white each) | 51918612 EUROLITE LED MF-100 RGBAW flower effect | Equipped with 5 x 3 W LED: 1 x red, 1 x green, 1 x blue, 1 x amber and 1 x white | Available in three different models (flowereffekt with/without mirror, barrel effect) | Functions: Static colors, colored beams in R, G, B, A and W, color change, color fade, strobe settings and motor-steps via DMX, Master/Slave

No. 42109550

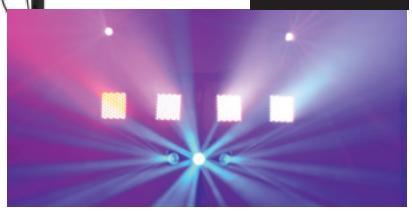

RGBAW | DMX

EUROLITE KLS-Kombo Pack 11

| Combines four LED spots, a flower effect and a water effect | The standard light system for every small band, solo entertainers and parties | Set consisting of: 42109781 EUROLITE LED KLS-401 Compact lightset, 51918557 EUROLITE LED MAT-Bar Hybrid matrix bar, 60004120 Speaker system stand alu, black, 59007081 EUROLITE STV-3529 Adapter long | Details to the products: | KLS-401 Compact lightset | Complete LED light set with 4 spots | Compact and easy to transport | 720 LEDs | 4 IEC outputs for power supply of further devices | LED MAT-Bar Hybrid matrix bar | The colorful flower-beams change their direction of movement at every bass-beat in sound controlled mode | Functions: static colors, internal programs, strobe effect, Master/Slave | Convenient controlling possible via easy-to-handle remote control | Equipped with 256 x 5mm RGBAW LEDs as well as 108 x SMD LEDs in white

No. 42109551

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

HIGH POWER LED | DMX

EUROLITE KLS-Kombo Pack 12

| Combines four LED spots, two flower effects | The standard light system for every small band, solo entertainers and parties | Set consisting of: 42109781 EUROLITE LED KLS-401 Compact lightset, 2 x 51918619 EUROLITE LED FE-600 Flower effect, 60004120 Speaker system stand alu, black, 59007081 EUROLITE STV-3529 Adapter long | Details to the products: | KLS-401 Compact lightset | Complete LED light set with 4 spots | Compact and easy to transport | 720 LEDs | 4 IEC outputs for power supply of further devices | LED FE-600 Flower effect | The colorful flower-beams change their direction of movement at every bass-beat in sound controlled mode | Strobe effect | Auto mode | Chaser speed adjustable via DMX | Internal programs | Master/Slave function

No. 42109552

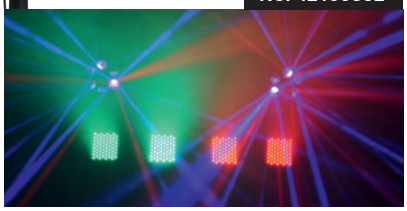

HIGH POWER LED | RGBAW | DMX | TCL

EUROLITE KLS-Kombo Pack 13

| Combines six LED spots and four flower effects | The standard light system for every small band, solo entertainers and parties | Set consisting of: 42109851 EUROLITE LED KLS-801 Compact lightset, 51918579 EUROLITE LED FE-Bar RGBAW light set, 60004120 Speaker system stand alu, black, 59007081 EUROLITE STV-3529 Adapter long | Details to the products: | KLS-801 Compact lightset | Complete LED light set with 4 spots | Compact and easy to transport | 28 TCL LEDs | 4 IEC outputs for power supply of further devices | LED FE-Bar RGBAW light set | Equipped with 20 x 1 W LED in red, green, blue, white and amber | The colorful flower beams change their direction of movement at every bass beat in sound controlled mode

No. 42109553

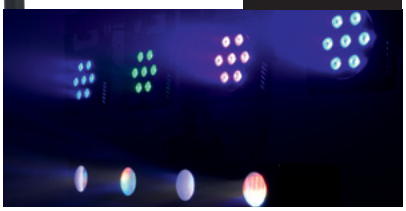

HIGH POWER LED | RGBAW | DMX | TCL

EUROLITE KLS-Kombo Pack 14

| Combines four LED spots and four LED bars with RGB color mixture | The standard light system for every small band, solo entertainers and parties | Set consisting of: 42109875 EUROLITE LED KLS-1001 Compact lightset, 51918557 EUROLITE LED MAT-Bar Hybrid matrix bar, 2 x 42109925 EUROLITE LED ACS BAR-12 RGB 12x1W, 60004120 Speaker system stand alu, black, 59007081 EUROLITE STV-3529 Adapter long | Details to the products: | KLS-1001 Compact lightset | Complete LED light set with 4 spots | Compact and easy to transport | 48 TCL LEDs | 4 IEC outputs for power supply of further devices | LED MAT-Bar Hybrid matrix bar | The colorful flower-beams change their direction of movement at every bass-beat in sound controlled mode | Functions: static colors, internal programs, strobe effect, Master/Slave | Convenient controlling possible via easy-to-handle remote control | Equipped with 256 x 5mm RGBAW LEDs as well as 108 x SMD LEDs in white | ACS BAR-12 12x1W | Equipped with 12 x 1 W LEDs | Beam angle approximately 16°

No. 42109554

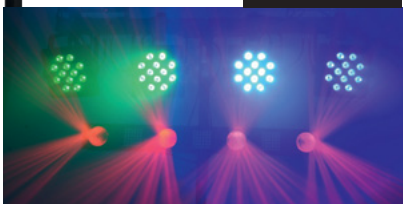

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

Power supply:	230 V AC, 50 Hz
Power consumption:	13 W/30 VA
Number of channels:	2
DMX-512 connection:	3-pin XLR
Type of LEDs:	15 W
Number of LEDs:	1
Dimensions (LxWxH):	230 x 210 x 180 mm
Weight:	2 kg

EUROLITE LED LP-15 Logo-Projektor

| Logo projector with DMX | Equipped with 1 x 15 W LED | Floor, ceiling or trussing installation possible | Gobo size and gobo sharpness can be adjusted via two adjustment wheels

No. 51799338

DMX

HIGH POWER LED

EUROLITE LED BR-50 Flower effect

| Sound controlled LED zigzag effect | Sound-controlled mirror deflection via built-in microphone | With 5 x 1 W LEDs (RGBAW)

Power supply:	230 V AC, 50 Hz ~
Power consumption:	20 W/30 VA
Sound-control:	Via built-in microphone
LED-type:	5 W
Number of LEDs:	5 (RGBWA)
Dimensions (LxWxH):	250 x 195 x 220 mm
Weight:	2 kg

No. 51918528

RGBAW

HIGH POWER LED

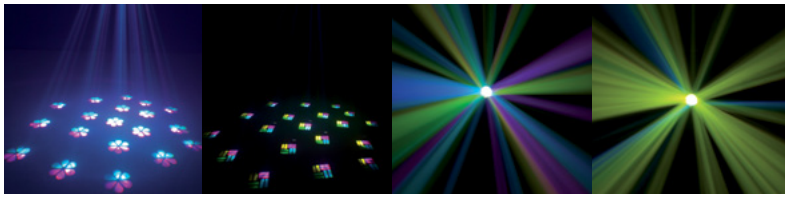

EUROLITE LED GF-10 Gobo flower effect

| Deco flower effect with built-in color gobo disk and mirror disk | Equipped with a white 10 W LED | DMX-controlled operation or stand-alone operation possible

Power supply:	230 V AC, 50 Hz ~
Power consumption:	30 W
Number of DMX-channels:	3
DMX-512 connection:	3-pin XLR
LED type:	10 W
Dimensions (LxWxH):	240 x 190 x 185 mm
Weight:	3.3 kg

No. 51918537

TCL

HIGH POWER LED

EUROLITE LED RV-3x3 Beam effect

| Beams from 6 lenses fill the whole room | Sound-controlled via built-in microphone | Equipped with 3 x 3 W LEDs: red, green, blue

Power supply:	230 V AC, 50 Hz ~
Power consumption:	30 W
Sound-control:	via built-in microphone
LED type:	3 W
Number of LEDs:	3 (1 x red/ green/blue)
LED beam angle:	140°
Dimensions (LxWxH):	285 x 250 x 255 mm
Weight:	3 kg

No. 51918521

HIGH POWER LED

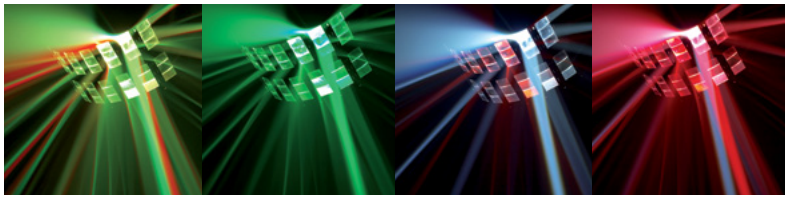

EUROLITE LED D-800 Beam effect

| Beam effect with 2 x 8 W quadcolor LED | 2 lens rows with a total of 12 glass-lenses | Equipped with one 4in1 LED in the colors red, green, blue and white and one in the colors red, green, blue and amber

Power supply:	230 V AC, 50 Hz ~
Power consumption:	90 W
Number of DMX channels:	3
LED type:	8 W QCL
Number of LEDs:	2
Dimensions:	340 x 370 x 285 mm
Weight:	4.6 kg

No. 51918215

HIGH POWER LED

DMX

QCL

EUROLITE LED TIO-1 Bar with IR

| RGB wash, multicolor white flower in one device | Sound controlled or via IR remote control | Equipped with 264 x 5mm LEDs

Power supply:	230 V AC, 50 Hz ~
Power consumption:	20 W/40 VA
Number of LEDs:	
Wash effect:	144 (48R, 48G, 48B)
Flower effect 1:	60 (15R, 10G, 10B, 10A, 15W)
Flower effect 2:	60 (white)
Dimensions (LxWxH):	500 x 175 x 160 mm
Weight:	2.75 kg

No. 51918529

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

Power supply:	230 V AC, 50 Hz ~
Power consumption:	130 W/250 VA
DMX control channels:	7
DMX512 connection:	3-pin XLR
LED type:	3 W
Number of LEDs:	49
Beam angle:	20°
Dimensions (LxWxH):	278 x 270 x 330 mm
Weight:	2.3 kg

EUROLITE LED PAR-64 RGBW UV short

Versatile LED PAR-64 spot with 3 W LEDs | Equipped with 49 x 3 W LEDs (RGBW UV) | Operable in stand-alone mode or via DMX

No. 51914073 .....black
No. 51914074 .....silver

RGBW | UV | DMX | HIGH POWER LED

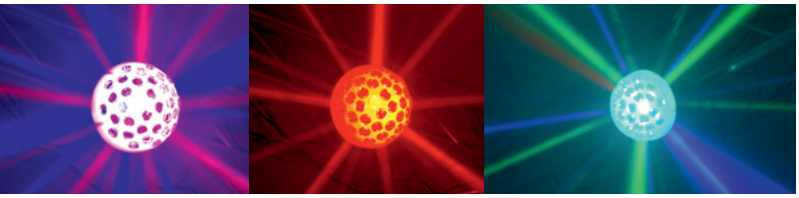

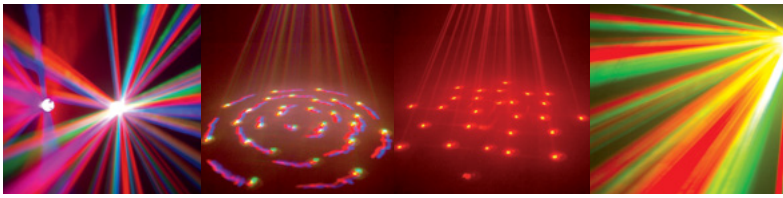

EUROLITE LED B-12 MC Beam effect

Milky half ball with 34 clear lenses | Equipped with 5 x 3 W LEDs | 20 rotations per minute | Operable in stand-alone mode, with DMX interface or sound mode

Power supply:	230 V AC, 50 Hz ~
Power consumption:	38 W/55 VA
Rotation-speed:	approx. 20 RPM
DMX control channels:	8
Number of LEDs:	5
Dimensions (LxWxH):	225 x 210 x 235 mm
Weight:	1.5 kg

No. 51918822

HIGH POWER LED | RGBAW | DMX

EUROLITE LED FE-30 Flower effect

As bright as halogen; flower with one TCL | Works without controller | Colorful flower beams - 7 possible color combinations

Power supply:	230 V AC, 50 Hz ~
Power consumption:	15 W
LED type:	3 W TCL
Number of LEDs:	1
Beam angle:	33°
Dimensions (LxWxH):	180 x 180 x 150 mm
Weight:	1.5 kg

No. 51918602

TCL

EUROLITE LED BAR-126 UV 10mm 15° inkl. IR

UV LED bar with infrared remote control | Perfect for decorative and illumination purposes | Functions: dimming, sound-control, strobe effect, Master/Slave | Standing or hanging installation possible | Equipped with 126 x 10 mm UV LEDs

Power supply:	230 V AC, 50 Hz ~
Power consumption:	14 W/30 VA
Number of DMX channels:	2
LED-type:	10 mm UV
Number of LEDs:	126
Dimensions (LxWxH):	575 x 65 x 90
Weight:	1 kg

No. 51930301

DMX | UV

EUROLITE N-110 Smoke machine

Ideal for small to medium-sized discotheques or small stages | On/off remote control | Mounting bracket

Power supply:	230 V AC, 50 Hz ~
Power consumption:	1000 W
Smoke-output:	approx. 5 m
Warm-up time:	approx. 4 min.
Fluid consumption:	approx. 130 ml/min.
Output volume:	approx.120 m³/min.
Dimensions (LxWxH):	385 x 290 x 275 mm
Weight:	5 kg

No. 51701965

DMX

EUROLITE LED BAR-252 UV 10mm 15° inkl. IR

UV LED bar with infrared remote control | Perfect for decorative and illumination purposes | Functions: dimming, sound-control, strobe effect, Master/Slave | Standing or hanging installation possible | Equipped with 252 x 10 mm UV LEDs

Power supply:	230 V AC, 50 Hz ~
Power consumption:	25 W/55 VA
Number of DMX channels:	2
LED-type:	10 mm UV
Number of LEDs:	252
Dimensions (LxWxH):	1075 x 65 x 90
Weight:	2 kg

No. 51930302

DMX | UV

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

Power supply:	230 V AC, 50 Hz ~
Power consumption:	560 W/560 VA
Sound-control:	via built-in microphone
Dimensions (WxDxH):	440 x 430 x 340 mm
Weight:	7 kg

EUROLITE D-26E Apollo EC Beam effect

| Sound-controlled via built-in microphone | In total 32 beams provide a room-filling effect | Very high light output

No. 51806228

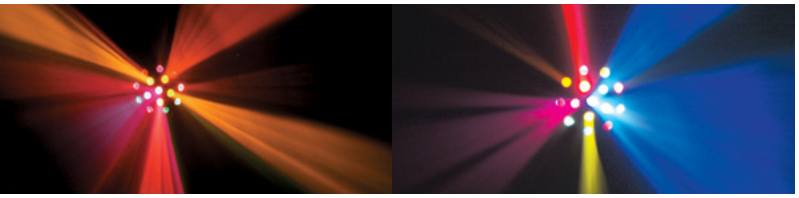

EUROLITE DS-10 Fan effect

| 15 lenses with different colors | Sound-controlled via built-in microphone | Low power consumption

Power supply:	230 V AC, 50 Hz ~
Power consumption:	100 W
Sound-control:	via built-in microphone
Dimensions (LxWxH):	290 x 185 x 225 mm
Weight:	2 kg

No. 51812250

EUROLITE Z-20 Zig Zag C Beam effect

| Sound-controlled via built-in microphone | With two 120 V/300 W lamps | Ready for connection with power plug

Power supply:	230 V AC, 50 Hz ~
Power consumption:	600 W
Sound-control:	Via built-in microphone
Dimensions (LxWxH):	360 x 280 x 280 mm
Weight:	3 kg

No. 51812541

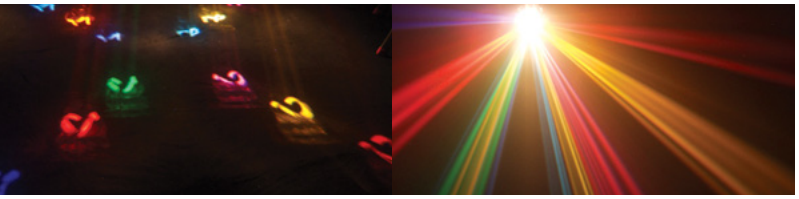

EUROLITE MF-2S Miniflower color

| Colorful flower beams | Three different modes can be selected | Flower effect static and rotating

Power supply:	230 V AC, 50 Hz ~
Power consumption:	110 W
Sound-control:	via built-in microphone
Dimensions (LxWxH):	185 x 160 x 170 mm
Weight:	1.3 kg

No. 5180828C

EUROLITE Mini Double Ball Beam effect

| 2 x 19 beams in 4 colors are thrown whirlwind-like through the room | Brilliant, intensive colors | Standing installation

Power supply:	230 V AC, 50 Hz ~
Power consumption:	35 W
Rotation-speed:	
Around main axle:	approx. 16 RPM
Around ball-axle:	approx. 43 RPM
Dimensions (LxWxH):	230 x 180 x 200 mm
Weight:	0.8 kg

No. 51812234

UV-spot incl. UV energy saving lamp 25W

| High quality reflector | UV lamp included | Metal housing with mounting bracket

Power supply:	230 V AC, 50 Hz ~
Power consumption:	50 W
Dimensions (LxWxH):	210 x 180 x 250 mm
Weight:	1 kg

No. 51100700

UV

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

Power supply:	12 V DC, 0.75 A
Watts per meter/total:	7.2 W/10.8 W
Protection grade:	IP 68
LED type:	SMD 5050
Number of LEDs	45
Serial connection:	Yes
Cutting mark:	every 100 mm
Length:	1500 mm
Weight:	70 g

EUROLITE LED IP Strip Set 45 1,5m RGB 12V

Complete set with control unit, IR remote and power unit | Plug-type system requires no soldering or complex installation | Extendable | Direct color selection for 16 preset colors | Color change, color fade and strobe effect

No. 50532000

IP outdoor use

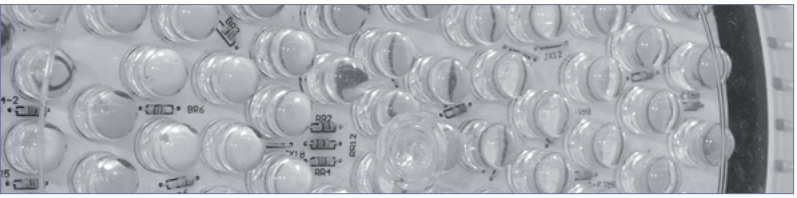

EUROLITE LED Techno Strobe 500, Sound

2 to 30 flashes per second | Plastic-housing with mounting bracket and fixation screws | 144 x 10mm whtie LEDs

Power supply:	230 V AC, 50 Hz ~
Power consumption:	22 W
Flash-rate:	2-30 Hz
Beam angle:	11°
Color temperatur:	6400K
Dimensions (LxWxH):	280 x 230 x 300 mm
Weight:	1.5 kg

No. 52200835

LED Mirror ball 13cm w/ illuminated base

18 LEDs in the base (6x red, 3x blue, 3x green, 6x white) | 12 rotations per minute

Power supply:	4.5 V DC (via DC 4.5 V power-unit included in the delivery, or 3 x 1.5 V AA batteries)
Power consumption:	4.6 W
Rotation-speed:	approx. 12 RPM
Dimensions (LxWxH):	130 x 130 x 210 mm
Weight:	0.5 kg

No. 42109269

EUROLITE LED H2O Water-effect IR

Spherical LED water effect (RGB) with infrared remote-control | Fading colors and switching colors

Power supply:	230 V AC, 50 Hz ~
Power consumption:	10 W/22 VA
Number of LEDs:	1
LED type:	9 W TCL
LED beam angle:	35°
Dimensions:	135 x 165 x 170 mm
Weight:	0.5 kg

No. 51918701

EUROLITE LED Buzzer-police light

Rotating double reflector 180° opposed, with an LED as central light source | For 3x AA 1.5V batteries (not included in delivery)

Power supply:	4.5 V DC
Power consumption:	1 W
Fitting battery:	3 x AA 1.5 V (not included in delivery)
Dimensions (LxWxH):	119 x 119 x 106 mm
Weight:	0.20 kg

No. 50603650 .....blue
No. 50603652 .....red

Mirror ball set with LED RGB spot IR

Comes in a sales-promoting 4-color carton | Mirror ball with a diameter of 20/30 cm | With EUROLITE T-36 Pinspot, black

LED PST-9W TCL IR Spot:	
Power supply:	230 V AC, 50 Hz ~
Power consumption:	11 W/20 VA
Type of LED:	9 W TCL
Dimensions (LxWxH):	135 x 165 x 170 mm
Weight:	0.5 kg

No. 50101857.....20 cm
No. 50101862.....30 cm

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

OMNITRONIC TMC-3 Interface incl. VDJ | USB controller and audio interface | Analog mixer operation | Virtual DJ 7 LE | 2 line/phono inputs | XLR/RCA outputs | Microphone input

No. 11045044

USB PC connect

Type:	USB MIDI controller
Power supply:	5 V DC, 500 mA via USB port or 5 V DC, 1000 mA via supplied PSU
Inputs: Line/phono:	2 x stereo RCA, switchable
DJ microphone:	3-pin XLR and 6.3 mm jack, bal.
Outputs: Master:	3-pin stereo XLR and stereo RCA
Booth:	stereo RCA
Rec:	stereo RCA
Headphones:	3.5 mm and 6.3 mm jack, bal.
USB port:	2.0, type B
Converter:	16 bits
Sample rate:	48 kHz
Dimensions:	360 x 260 x 70 mm
Weight:	1.7 kg

OMNITRONIC TMC-2 MK2 Interface incl. VDJ | USB MIDI controller and audio interface | Virtual DJ 7 LE | XLR/RCA outputs | Headphones output | Microphone input

No. 11045043

USB PC connect

Type:	USB MIDI controller
Power supply:	5 V DC, 500 mA via USB port or 5 V DC, 1000 mA via supplied PSU
Inputs: DJ microphone:	3-pin XLR and 6.3 mm jack, bal.
Line:	stereo RCA
Outputs: Master:	3-pin stereo XLR and stereo RCA
Booth:	stereo RCA
Rec:	stereo RCA
Headphones:	3.5 mm and 6.3 mm jack, bal.
USB port:	2.0, type B
Converter:	16 bits
Sample rate:	48 kHz
Dimensions:	360 x 260 x 70 mm
Weight:	1.7 kg

OMNITRONIC PME-4 Studio monitors/pair | 10 cm bass-midrange speaker and 2.5 cm dome tweeter

No. 11036452

ACTIVE

Power supply:	115/250 V AC, 50/60 Hz ~
Power consumption:	30 W
Rated power:	10 W RMS
Program power:	20 W
Components:	10 cm woofer, 2.5 cm horn
Connection:	stereo RCA
Dimensions (LxWxH):	165 x 147 x 222 mm
Weight:	4 kg

OMNITRONIC PME-5 Studio monitors/pair | 13 cm bass-midrange speaker and 2.5 cm dome tweeter

No. 11036453

ACTIVE

Power supply:	115/250 V AC, 50/60 Hz ~
Power consumption:	50 W
Rated power:	20 W RMS
Program power:	40 W
Components:	13 cm woofer, 2.5 cm horn
Connection:	stereo RCA
Dimensions (LxWxH):	255 x 181 x 190 mm
Weight:	6 kg

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

SPEAKER

with flange

DS-153 DS-123 DS-103 DS-83

Product:	DS-83	DS-103	DS-123	DS-153
Rated power:	150 W RMS	200 W RMS	250 W RMS	300 W RMS
Program power:	300 W	400 W	500 W	600 W
Components:	20 cm woofer, 2 tweeters	25 cm woofer, horn, tweeter	30 cm woofer, horn, 2 tweeters	38 cm woofer, horn, 3 tweeters
Connections:	2 Speaker sockets	2 Speaker sockets	2 Speaker sockets	2 Speaker sockets
Max. SPL (1 m):	93 dB	94 dB	95 dB	96 dB
Impedance:	8 Ω	8 Ω	8 Ω	8 Ω
Frequency range:	50-20,000 Hz	45-20,000 Hz	40-20,000 Hz	35-20,000 Hz
Dimensions (H x W x D):	480 x 320 x 250 mm	550 x 370 x 280 mm	645 x 440 x 350 mm	750 x 510 x 360 mm
Weight:	8 kg	9,5 kg	14 kg	22 kg

No. 11037106 .....DS-83
No. 11037111.....DS-103
No. 11037116 .....DS-123
No. 11037121 .....DS-153

OMNITRONIC DS MK2 3-way speaker

| Party speaker system for disco and rock music | Improved version with more power | 3-way bass-reflex system | Speaker connections | Piezo super tweeter for powerful treble | High-quality horn for smooth mid-range | Optional subbass provides a powerful bass | Stable wooden housing with protective grille and tray handles | Scratch-resistant black felt covering | Stable protective steel corners | Flange for stand installation | Applicable as floor monitor, on a subwoofer, standing, on a speaker stand or wall holder | Compact dimensions for car transport

DX-2522

DX-2222

DX-2022

with flange

Product:	DX-2022	DX-2222	DX-2522
Rated power:	400 W RMS	500 W RMS	600 W RMS
Program power:	800 W	1000 W	1200 W
Bass speaker:	2 x 25 cm	2 x 30 cm	2 x 38 cm
Speakers:	1 piezo, 1 horn	1 piezo, 1 horn	2 piezo, 1 horn
Connections:	2 Speaker sockets	2 Speaker sockets	2 Speaker sockets
Sensitivity (max.):	96 dB	99 dB	101 dB
Impedance:	8 Ω	8 Ω	8 Ω
Frequency range:	45-20,000 Hz	30-18,000 Hz	30-18,000 Hz
Dimensions (H x W x D):	780 x 350 x 330	910 x 375 x 360	1060 x 500 x 405
Weight:	15 kg	18 kg	40 kg

No. 11037085 .....DX-2022
No. 11037087 .....DX-2222
No. 11037091 .....DX-2522

OMNITRONIC DX 3-way speaker

| Piezo-super-tweeters for powerful HIs | Voluminous casings provide a powerful bass | Professional workmanship | With plastic transport handle | Felt-covered casing | 8 stable protective steel corners | Also suitable for the private area due to smoothly suspended bass speaker (e. g. for being connected with the private Hifi-equipment) | Flange for stand installation | Ideal as well for mobile discos or for fixed mounting in party rooms etc. | Excellent quality at a low price

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

SUBWOOFER

Rated power:	150 W RMS
Program power:	300 W
Components:	20 cm woofer (8"), 3.5 cm driver (1.33")
Connections:	2 Speaker sockets (4-pin)
Sensitivity (1 W/m):	92 dB
Max. SPL (1 m):	113 dB
Impedance:	8 ohms
Frequency range:	70 Hz - 18 kHz
Crossover frequency:	2.5 kHz
Dimensions (H x W x D):	250 x 465 x 340 mm
Weight:	11 kg

No. 11040804.....CSA-218B, black
No. 11040805.....CSA-218W, white

High frequency horn

PSSO CSA tops |

Satellite for CSA-115 | Horn tweeter for powerful highs | Speaker flange for mobile use included in the delivery | Wide horizontal dispersion angle

Rated power:	300 W RMS
Program power:	600 W
Components:	2 x 20 cm woofer (2 x 8"), 3.5 cm driver (1.33")
Connections:	2 Speaker sockets (4-pin)
Sensitivity (1 W/m):	95 dB
Max. SPL (1 m):	119 dB
Frequency range:	75 Hz - 18 kHz
Crossover frequency:	2.5 kHz
Dispersion angle (1 kHz):	H=90°, V=40°
Dimensions (H x W x D):	250 x 665 x 340 mm
Weight:	15 kg

No. 11040800.....CSA-228B, black
No. 11040801.....CSA-228W, white

PSSO CSA-115CX Subwoofer

Rated power:	400 W RMS
Program power:	800 W
Components:	38 cm woofer (15")
Connections:	2 Speaker sockets (4-pin)
Max. SPL (1 m):	123 dB
Impedance:	8 ohms
Frequency range:	40 Hz - 120 Hz
Crossover frequency:	120 Hz
Dimensions (H x W x D):	610 x 410 x 645 mm
Weight:	35 kg

No. 11040808.....black
No. 11040809.....white

| Compact subwoofer for permanent installations and touring purposes | Powerful bandpass subwoofer | Parallel Speaker connectors | Selector switch for bi-amping operation | Housing made of MDF wood | Scratch-resistant lacquer surface | Flange for top speaker installation

PSSO CSA-112 Subwoofer

Rated power:	2 x 150 W RMS
Program power:	2 x 300 W
Components:	30 cm woofer (12")
Connections:	2 x terminal (in/out)
Sensitivity (1 W/m):	91 dB
Max. SPL (1 m):	112 dB
Impedance:	2 x 8 ohms
Frequency range:	35 Hz - 150 Hz
Crossover frequency:	150 Hz
Dimensions (H x W x D):	450 x 520 x 520 mm
Weight:	25 kg

No. 11040811 .....black
No. 11040812.....white

| Compact speaker array for permanent installations | Powerful bassreflex subwoofer | Dual voice coil for high output | Integrated 150 Hz crossover | Pole terminals for connecting tops | Housing made of MDF woodd | Scratch-resistant lacquer surface

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

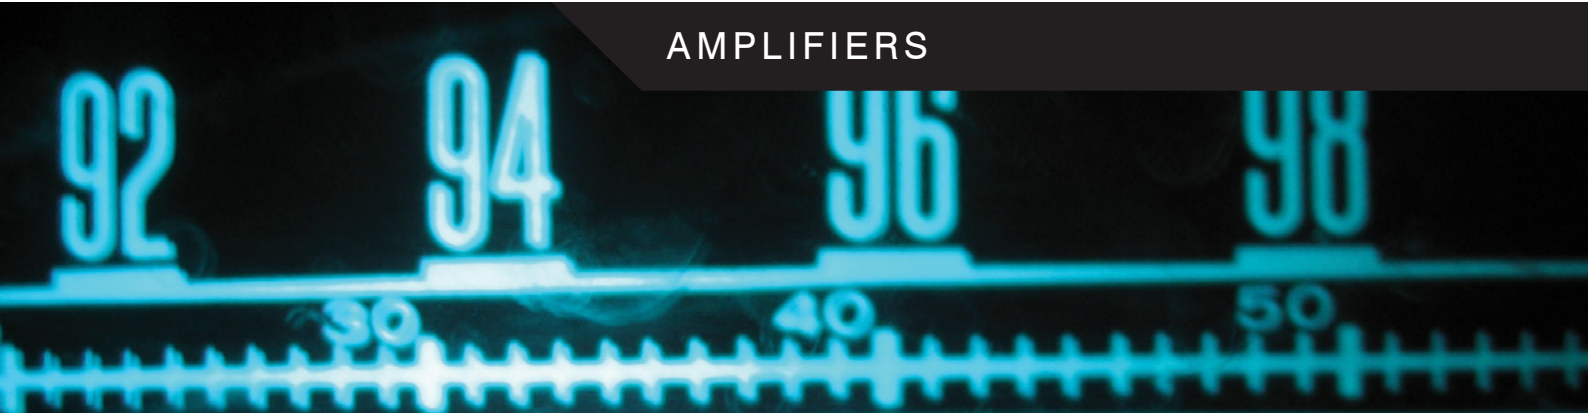

No. 10451050.....E-200, 2x100W
No. 10451055.....E-600, 2x150W
No. 10451060.....E-600, 2x300W
No. 10451065.....E-900, 2x450W
No. 10451070.....E-1300, 2x650W

OMNITRONIC E Amplifiers

| Stereo PA amplifier with integrated limiter | 2 operating modes can be selected (stereo or bridged) with LED indicators | Limiter, switchable | Speaker switch-on delay | 2 level controls | Each channel with LED for activated protective circuit (protect) and 7-fold output meter with clip LED | Complete protection set against short-circuit, overheat, DC voltage, power on/off transients | Groundlift switch against humming | Fan cooling | Signal inputs via XLR, RCA or 6.3 mm mounting jacks

Product:	E-200	E-300	E-600	E-900	E-1300
Power supply:	115/230 V AC, 50/60 Hz ~	115/230 V AC, 50/60 Hz ~	115/230 V AC, 50/60 Hz ~	115/230 V AC, 50/60 Hz ~	115/230 V AC, 50/60 Hz ~
Power consumption:	189 W (1/8 power)	327 W (1/8 power)	327 W (1/8 power)	327 W (1/8 power)	690 W (1/8 power)
Power output sine:	stereo 4 ohms 2 x 100 W	stereo 4 Ω 2 x 150 W	stereo 4 ohms 2 x 300 W	stereo 4 ohms 2 x 450 W	stereo 4 Ω 2 x 650 W
	stereo 8 ohms 2 x 60 W	stereo 8 Ω 2 x 100 W	stereo 8 ohms 2 x 200 W	stereo 8 ohms 2 x 300 W	stereo 8 Ω 2 x 350 W
	8 ohms bridged 1 x 200 W	8 Ω bridged 1 x 300 W	8 ohms bridged 1 x 600 W	8 ohms bridged 1 x 900 W	8 Ω bridged 1 x 1300 W
Slew rate:	40 V/µsec	40 V/µsec	45 V/µsec	45 V/µsec	45 V/µsec
S/N ratio:	>90 dB	>90 dB	>100 dB	>100 dB	>100 dB
Channel seperation:	>70 dB/ 1 kHz	>70 dB/ 1 kHz	>70 dB/ 1 kHz	>70 dB/ 1 kHz	>70 dB/ 1 kHz
Input sensitivity:	0.77 V	0.77 V	0.77 V	0.77 V	0.77 V
Dimensions (DxWxH):	345 x 482 x 100 mm	345 x 482 x 100 mm (19", 2 U)	345 x 482 x 100 mm	345 x 482 x 100 mm	375 x 482 x 100 mm (19", 2 U)
Weight:	8 kg	8.5 kg	10 kg	12 kg	14 kg

No. 10451082.....SMA-600
No. 10451084.....SMA-1000
No. 10451086.....SMA-1500
No. 10451088.....SMA-2000

OMNITRONIC SMA amplifier

| Times when powerful and reliable amps inevitably caused herniated vertebral disks are over. With modern switch-mode power supplies, a weight of less than 10 kilos can easily be realized, even amps with the power of several kilowatts are no exception. Both our top models prove to be weight watchers, they weigh only 9 kilos with an output power of 1500 watts and 2000 watts respectively. But the power/weight ratio is not the only exemplary feature, workmanship and reliability are on par and have already been praised by the specialized press (Soundcheck, September issue 2010; tools4music issue Oktober/November 2010). Primarily DJs and musicians benefit from these amenities. But even for technical service providers and installers, the SMA series offers an interesting alternative.

Product:	SMA-600	SMA-1000	SMA-1500	SMA-2000
Power supply:	230 V AC, 50 Hz ~	230 V AC, 50 Hz ~	230 V AC, 50 Hz ~	230 V AC, 50 Hz ~
Power consumption:	421 W (1/8 power)	598 W (1/8 power)	522 W (1/8 power)	575 W (1/8 power)
Power output sine:				
stereo 4 Ω	2 x 324 W	2 x 482 W	2 x 743 W	2 x 1000 W
stereo 8 Ω	2 x 231 W	2 x 340 W	2 x 480 W	2 x 637 W
8 Ω bridged	1 x 600 W	1 x 1000 W	1 x 1500 W	1 x 2000 W
Dimensions (D x W x H):	340 x 483 x 92 mm (19", 2 U)	390 x 483 x 92 mm (19", 2 U)	390 x 483 x 92 mm (19", 2 U)	390 x 483 x 92 mm (19", 2 U)
Weight:	6 kg	7 kg	9 kg	9 kg
	Class A/B construction	Class A/B construction	Class 2 H construction	Class 2 H construction

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

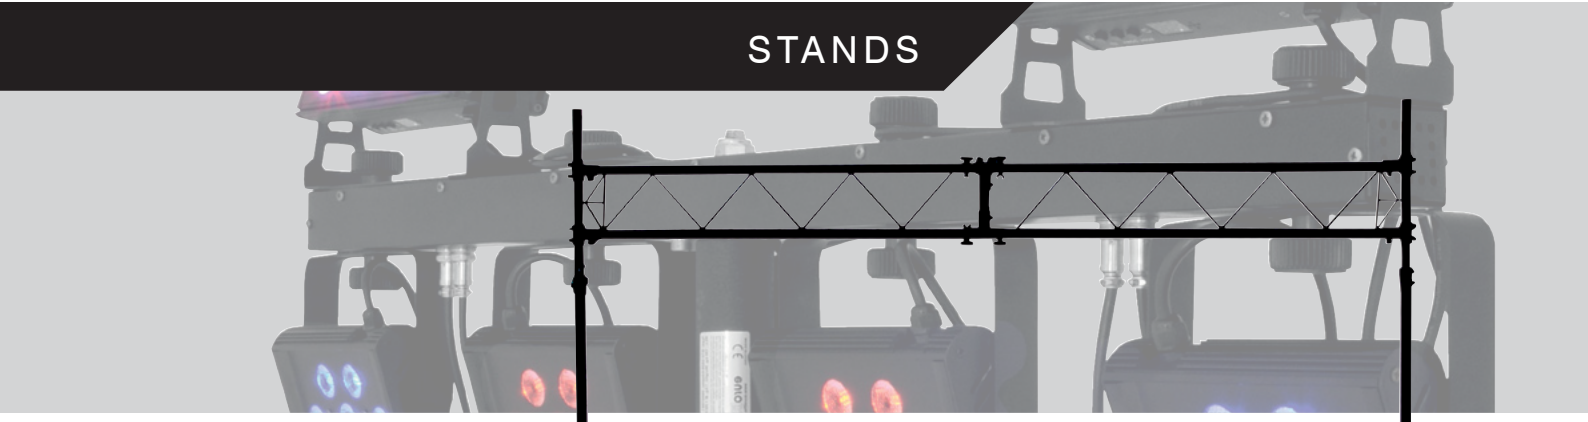

EUROLITE Show Stand I Alu

| Quickly mounted | Including 3 m cross section | Ideal for mobile discos, individual entertainers, ... | Extendable with additional cross sections

No. 59007010

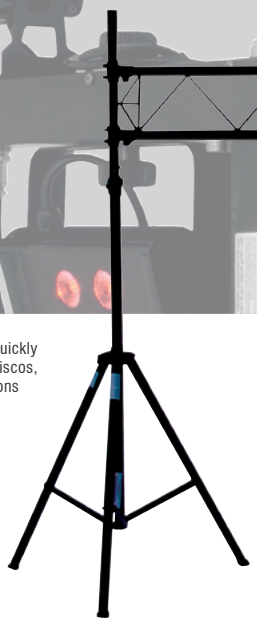

Max. Traglast/Stativ:	18 kg
Max. Traglast/Gesamtsystem:	25 kg
Mindesthöhe:	1,7 m
Maximale Höhe:	2,8 m
Höchsthub:	1,1 m
Gewicht/Stativ:	7,5 kg
Gewicht/Quertraverse:	10,5 kg
Gewicht/Gesamtsystem:	21 kg

No. 59006985

Max. carrying capacity:	14 kg
Minimum height:	1.20 m
Maximum height:	2.50 m
Maximum elevation:	1.30 m
Weight:	6 kg

EUROLITE A1 Lighting stand

| Stable lighting stand for mobile use | The telescopic tube is additionally fixed with a safety pin | With crossbeam for up to 4 spots - for TV-pins up to Ø 17 mm

No. 59006996 .....STV-40S, steel, 10 kg
No. 59007001 .....STV-40A, alu, 7 kg

Type:	Telescopic stand
Construction:	DIN 15560-27, DIN EN ISO 12100-2
Certified by:	CE
Sections:	2
Max. load:	18 kg
Max. height:	3.40 m
Min. height:	1.50 m
Adapter:	D = 28.5 mm
Base area:	D = 1.20 m
Transport dimensions:	1.59 x 0.18 x 0.15 m

EUROLITE STV-40S Steel lighting stand

| Stable lighting stand for mobile use | The telescopic tube is additionally fixed with a safety pin | For up to 4 spots | Crossbeam with TV-pin

Due to labor protection and DIN15560-27 requirements, we specify a maximum carrying capacity of 18 kg only for our telescopic lighting stands, even if the stands' actual capacity is higher.

OMNITRONIC STS-100 Speaker stand with crank

| Stable stand for mobile use. | The telescopic tube is additionally secured with winch release and fixation screw | Made of steel

No. 60004150

Max. carrying capacity:	35 kg
Minimum height:	1.40 m
Maximum height:	2.10 m
Weight:	7.5 kg

Speaker stand BASIC, set

| Stable speaker stands for mobile use | 3 carrier bags | The telescopic tube is additionally fixed with a safety pin

No. 60004020

Max. carrying capacity:	15 kg
Minimum height:	0.64 m
Maximum height:	1.72 m
Weight/stand:	4.2 kg
Total weight:	8.5 kg

Microphone tripod with boom, PRO

| Fully shock absorbing | Boom arm adjustable | Fully detachable

No. 60005844

Max. carrying capacity:	1.5 kg
Maximum height:	2.20 m
Weight:	2.2 kg

Overhead microphone stand

| Easy assembling | Fully shock absorbing | Boom arm adjustable

No. 60005868

Max. carrying capacity:	1.5 kg
Maximum height:	3.90 m
Boom length:	180 cm
Weight:	9 kg

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

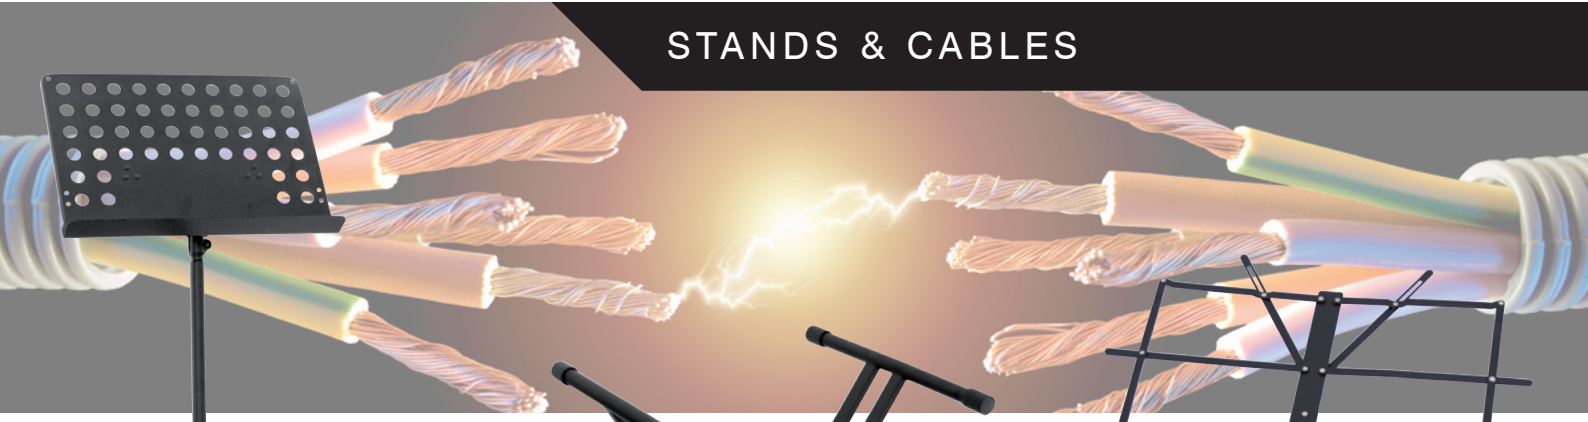

Orchestra stand | Fully adjustable music desk | Black | Stable base legs

No. 60006520

Min. height:	approx. 900 mm
Max. height:	approx. 1400 mm
Mounting area (WxL):	470 mm x 325 mm

Keyboard stand SV-1 with clamp lock |

Height adjustable due to quick-lock | Black | High quality

No. 60011000

Sheet holder for keyboard stands

No. 60011055

Tube diameter:	min. Ø 24 mm to max. Ø 27 mm
Height adjustable:	500 mm to 650 mm
Dimensions (WxH):	505 x 290 mm
Weight:	1 kg

3.5mm stereo jack plug 2x RCA 1.5m

No. 30224200

Cable 3.5mm T-jack plug stereo/2xRCA

No. 30225152.....1,5m



Cable AC 3.5 jack plug stereo/2x6.35 plug

No. 30225153.....AC-35, 1.5m
No. 30225155.....AC-35, 3m
No. 30225156.....AC-35, 6m



Speaker-cable PROFI 2x2.5mm²

No. 3022102N.....1.5 m
No. 3022105N.....3 m
No. 3022110N.....5 m
No. 3022120N.....10 m

Cable 6,3 plug to 6.3 plug

No. 3021050A.....KC-10, 1 m
No. 3021050D.....KC-15, 1,5 m
No. 3021050N.....KC-30, 3 m
No. 3021150N.....KC-60, 6 m
No. 3021151N.....KC-100, 10 m
No. 3021151P.....KC-150, 15 m

Cable CC 2x2 RCA-plugs HighEnd

No. 30209354.....CC-06, 0.6m
No. 30209356.....CC-09, 0.9m
No. 30209360.....CC-15, 1.5m
No. 30209370.....CC-30, 3m
No. 30209375.....CC-50, 5m
No. 30209380.....CC-100, 10m
No. 30209382.....CC-150, 15m



All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

Special combo case Pro

Professional solution for a complete DJ setput; this heavy-duty case accommodates your PA, a double CD player, a 483 mm mixer (19"), effect units, and further 483 mm units (19") | Top part with upward tilted profile rails for top-operated units e.g. mixers, control units of double CD players or lighting units

No. 30110003.....4 U
No. 30110002.....6 U

Product:	4 U	6 U
Maximum load:	50 kg	50 kg
Strength:	10 mm	9 mm
Outside dimensions (WxDxH):	575 x 535 x 405 mm	560 x 605 x 505 mm
Interior dimensions:		
Mounting width:	483 mm	483 mm
Mounting height:	180-270 mm (4-6 U)	270 mm (6 U)
Mounting depth:	450 mm (10 U)	450 mm (10 U)
Born plate:		390 x 330 mm
Weight:	10 kg	19 kg

Amplifier rack PR-2, 47cm deep

Profile rails with mounting facility for 483 mm units (19"), e.g. PA amplifiers, power packs, additional equipment | Front and rear rack rails | 2 removable covers (double-door version) | Max. depth 420 mm (plus 90 mm per cover) | High-quality workmanship with 7 mm plywood multilayered glued, black laminated | Aluminum profile frames (30 mm) with rounded edges

No. 30109784.....4 U
No. 30109786.....6 U
No. 30109788.....8 U
No. 30109790.....10 U
No. 30109792.....12 U

Product:	4 U	6 U	8 U	10 U	12 U
Maximum load:	25 kg	50 kg	50 kg	100 kg	100 kg
Strength:	7 mm	7 mm	9 mm	9 mm	9 mm
Outside dimensions :	545 x 640 x 220 mm	545 x 640 x 320 mm	545 x 640 x 405 mm	540 x 640 x 500 mm	545 x 640 x 600 mm
Corner dimensions:	64 mm	64 mm	64 mm	64 mm	64 mm
Weight:	10 kg	11.5 kg	16 kg	20 kg	22 kg

Effect rack CO DD, black

Suitable for 483 mm effectors and controllers (19") | 2 removable covers (double-door version) | Built-in rack rails | High-quality workmanship with 7 mm plywood multilayered glued, black laminated | Aluminum profile frames (22 mm) with rounded edges

No. 30107200.....2U
No. 30107220.....4U
No. 30107240.....6U
No. 30107260.....8U

Product:	D:38cm, 2U	D:38 cm, 4U	D:38 cm, 6U	D:38 cm, 8U
Maximum load:	20 kg	25 kg	50 kg	20 kg
Strength:	7 mm	7 mm	7 mm	7 mm
Outside dimensions:	ca. 525x560x150 mm	ca.525x560x240 mm	ca. 525x560x330 mm	ca. 525x560x420 mm
Corner dimensions:	ca. 50 mm	ca. 50 mm	ca. 50 mm	ca. 50 mm
Weight:	ca. 6 kg	ca. 8 kg	ca. 9 kg	ca. 10 kg

Microphone case Road 7 microphones

No. 30109900 .....black
No. 30109905 .....silver

Strength:	3,5 mm
Outside dimensions (WxDxH):	approx. 410 x 330 x 135 mm
Outer dimensions/corners:	approx. 45 mm
Weight:	approx. 2.5 kg

Universal case FOAM, GR-2

No. 30126213.....black
No. 30126214.....alu

Maximum load:	20 kg
Strength:	7 mm
Outside dimensions (WxDxH):	680 x 480 x 150 mm
Inside dimensions (WxDxH):	650 x 450 x 105 mm

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

Special combo case LS5 laptop desk

| Suitable for 483 mm units (19"), e.g. controllers and mixers | Upward tiltable profile rails 10 U for top-operated units | Non-slip, slidable tray for all customary notebook sizes | High-quality workmanship with 9 mm plywood multilayered glued, black laminated | Aluminum profile frames (30 mm) with rounded edges

No. 3011000G .....8 U
No. 3011000J .....10 U
No. 3011000L .....12 U

Product:	8 U	10 U	12 U
Maximum load:	50 kg	100 kg	100 kg
Strength:	9 mm	9 mm	9 mm
Outside dimensions:	560 x 590 x 580 mm	560 x 600 x 665 mm	560 x 590 x 765 mm
Laptop area:	510 x 280 mm	510 x 280 mm	510 x 280 mm
Weight:	19 kg	20 kg	32 kg

CD case digital booking, rounded

| 3 compartments for approx. 90 CDs | Interior upholstered with foam (gray) | High-quality workmanship with 4 mm wall thickness | Aluminum profile frames (40 mm) with rounded edges | Removable cover | 2 high-quality spring locks, supplied with 2 keys

No. 30122056.....alu
No. 30122058.....camo
No. 3012205A .....red
No. 3012205B .....black
No. 3012205C .....blue

Maximum load:	10 kg
Strength:	4 mm
Outside dimensions (WxDxH):	approx. 425 x 380 x 175 mm
Weight:	approx. 3.1 kg

Mixer/CD player case, carpet covered

| Rugged wooden case (12 mm wall thickness) with black felt cover |section (top) with upward tilted profile rails for top-operated units e.g. control units of DJ CD players |ection (middle) with upward tilted profile rails for top-operated units e.g. mixers

No. 30112540.....3/4 U

Maximum load:	50 kg
Strength:	20 mm
Outside dimensions (WxDxH):	approx. 535 x 450 x 495 mm
Weight:	13 kg

Double CD player case Tour Pro

| For DJ dual CD-players with separate control unit | Section 1 for control units with 2 U, can be tilted upwards | Section 2 for CD mechanisms with 2 U | 2 removable covers (double-door version) | Operation possible when units are built-in | Interior upholstered with foam (black)

No. 30124550.....2 U

Maximum load:	25 kg
Strength:	7 mm
Outside dimensions (WxDxH):	approx. 640 x 530 x 140 mm
Weight:	approx. 8 kg

Mixer case DJM

No. 30111602 .....DJM-400
No. 30111600 .....DJM-800

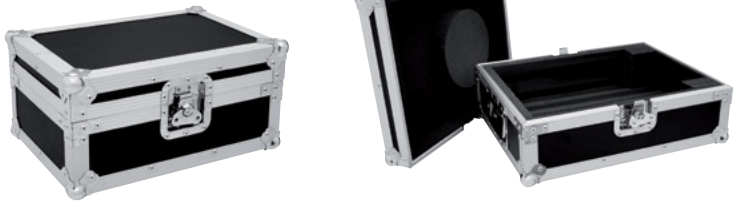

Maximum load:	25 kg	Max. load:	25 kg	Max. load:	15 kg
Strength:	10 mm	Strength:	10 mm	Strength:	8 mm
Outside dimensions:	approx. 440 x 305 x 215 mm	Outside dimensions:	515 x 400 x 215 mm	Outside dimensions:	545 x 455 x 240 mm
Weight:	approx. 5.7 kg	Weight:	5.7 kg	Weight:	7 kg

Mixer case Pro MCBL-19

No. 3011155X .....8 U
No. 3011155Z .....12 U

Maximum load:	25 kg
Strength:	7 mm
Outside dimensions:	approx. 550 x 615 x 240 mm
Weight:	approx. 9 kg

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.

Set OMNITRONIC DD-5220L + Haube +Case PRO

No. 09009798

Power supply:	230 V AC, 50 Hz ~
Power consumption:	15 W
Connectors:	1 x stereo RCA
	Line/phono, switchable
Dimensions:	450 x 352 x 148 mm
Weight:	11 kg

No. 10603003 OMNITRONIC DD-5220L Turntable

Direct drive | Initial torque >4.5 kg/cm | Adjustable start/stop time | Tone arm height adjustable | Phono/line output

No. 30123310 Turntable case tour Pro black -B-

No. 10603006 Dust-cover for DD-5250 and DD-5220L

Set: OMNITRONIC DD-2550 inkl. Case PRO

No. 09009913

USB

Power supply:	115/230 V AC, 50/60 Hz ~
Power consumption:	12 W
Drive method:	Direct drive
Output connectors:	RCA, USB type B
Dimensions:	450 x 350 x 155 mm
Weight:	11 kg

No. 10603061 OMNITRONIC DD-2550 USB turntable

USB interface | Incl. recording software | Precision direct drive | Switchable phono/line output

No. 30123310 Turntable case tour Pro black -B-

Set OMNITRONIC DD-2520 + Case PRO

No. 09009797

USB

Power supply:	115/230 V AC, 50/60 Hz ~
Power consumption:	12 W
Drive method:	Direct drive
Output connectors:	RCA, USB type B
Dimensions:	450 x 350 x 155 mm
Weight:	11 kg

No. 10603060

USB interface | Incl. recording software | Precision direct drive | Switchable phono/line output

No. 30123310 Turntable case tour Pro black -B-

Set OMNITRONIC PM-444USB + Mixer-Case 6HE

No. 09009796

USB

Power supply:	100-240 V AC, 50/60 Hz ~
Power consumption:	25 W
USB port:	2.0, type B
Frequency range:	20-20,000 Hz
Dimensions (WxHxD):	483 x 177 x 101 mm (19")
Weight:	2.9 kg

No. 10006823 OMNITRONIC PM-444USB 4-channel DJ mixer

Club mixer with 4 channels | Integrated USB audio interface | Inputs: 1 x USB, 5 x line, 2 x phono | 1 DJ microphone channel | Balanced XLR outputs

No. 3011151A Mixer case Pro MCB-19,sloping,black

All prices in Euro including 19% VAT. National prices can be different due to local VAT rates. Misprints and omissions exempted. Technical specifications, prices and availability are subject to change. Products may differ from picture. General Conditions of the supplier are binding.